

## **Network Pro**

## The world's most advanced communications hub for connected commercial refrigeration

The Network Pro delivers an always-on connected solution enabling you to get the most value possible from the AoFrio ecosystem. This represents the biggest enhancement of our market-leading commercial refrigeration IoT offering to date and is a direct response to the challenges that our customers face when it comes to managing widely dispersed cooler fleets.


By acting as a connectivity hub for AoFrio IoT devices (such as SCS, Click and Monitor) the Network Pro enables all the benefits of daily data collection and real-time alerts.



Specifications	
Input voltage and current	4.5V – 6.4V DC, 300mA max
Cellular communications	LTE Cat M1 with 2G (GPRS) fallback
Cellular bands	B1, B2, B3, B4, B5, B8, B12,B13, B18, B19, B20, B25, B28, B39
Connectivity	Bluetooth (BLE 4.1)
Wi-Fi (Geo-location only)	2.4GHz, 802.11 b/g/n
Battery	750mAh, 3.7V, Li-Po (approx. 12 hrs full product operation)
Status LEDs	1 x Power Status ; 1 x Battery Status ; 2 x Cellular status
Connector/Interface	3.5mm 4 pole audio plug
Mounting method	2 x self-tapping screws or double sided adhesive pad
Ingress protection	IP43
Operating temperature <sup>1</sup>	-20°C to +60°C (-4°F to 140°F)
Storage temperature	-20°C to +60°C (-4°F to 140°F)
Weight	63g (2.2oz)
Approvals	CEFC & NOM

<sup>&</sup>lt;sup>1</sup> Backup battery charging only occurs between 0°C and 40°C

## **Dimensions**

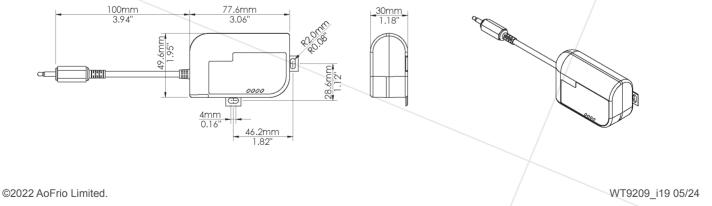

Trademarks are (as applicable) 'TM' and ® of AoFrio Limited. While all information in this document is believed by AoFrio Limited to be accurate and reliable, AoFrio Limited and its subsidiaries and affiliates and their directors, officers and employees are not responsible for any errors or omissions of any kind whatsoever, and to the maximum extent permitted at law, have no liability in tort, contract, or otherwise to any user and/or any third party.

E: info@aofrio.com www.aofrio.com